




www.teko-gmbh.com

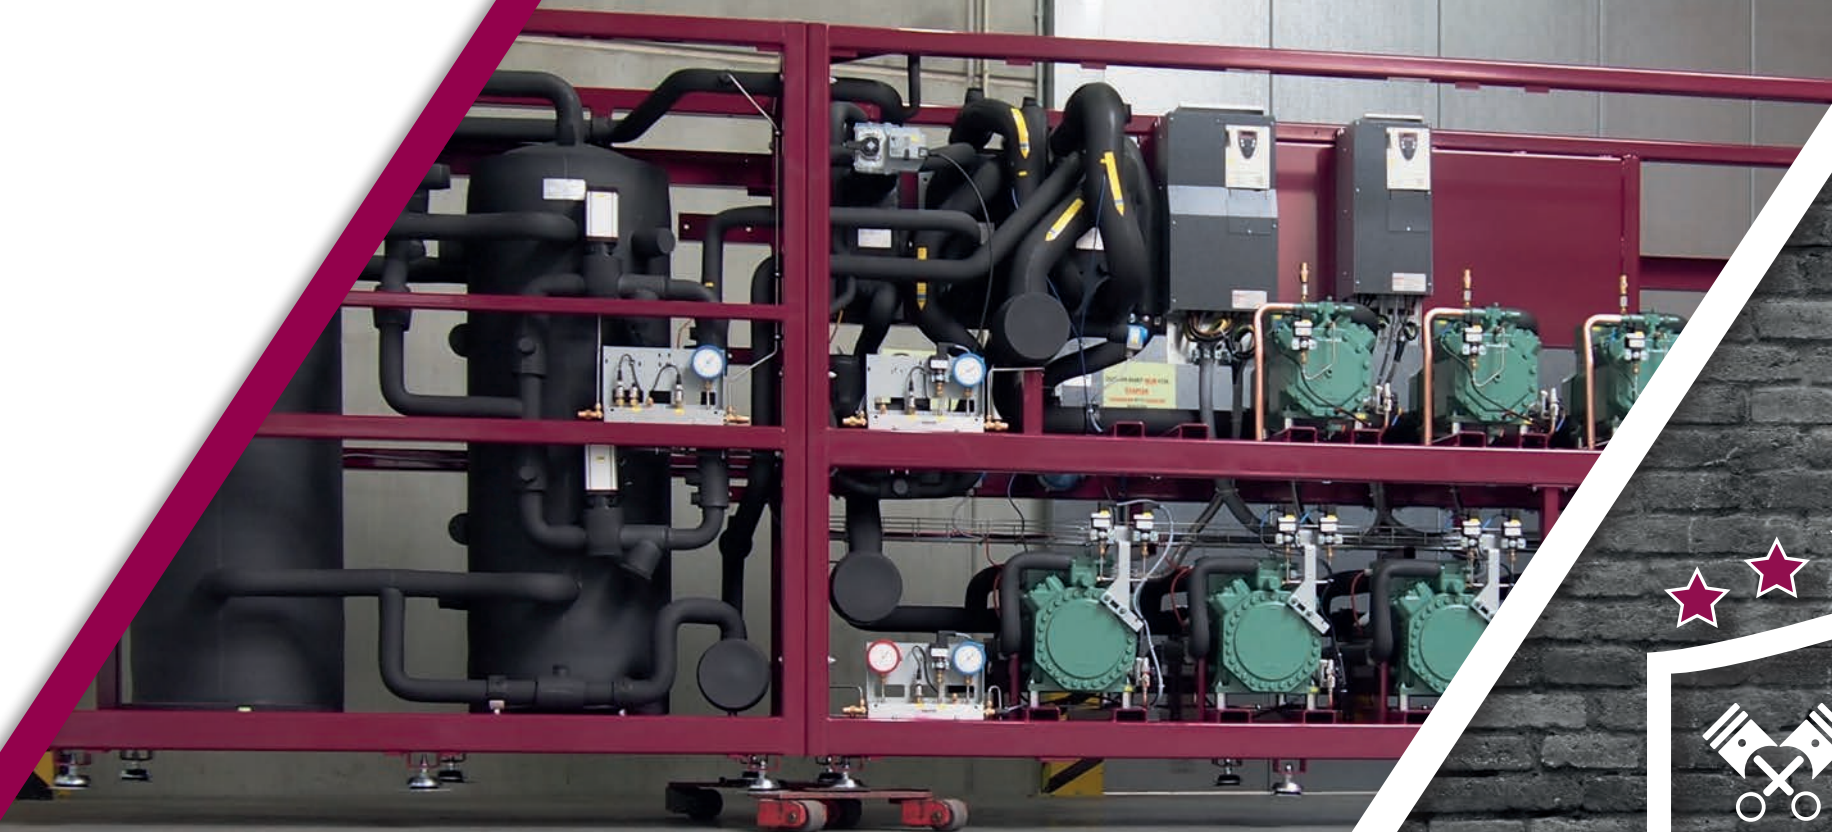

Roxsta industrial

Application



Hypermarkets /
Cash&Carry




Logistics
Warehouses



Industrial- /
Process Cooling



Performance

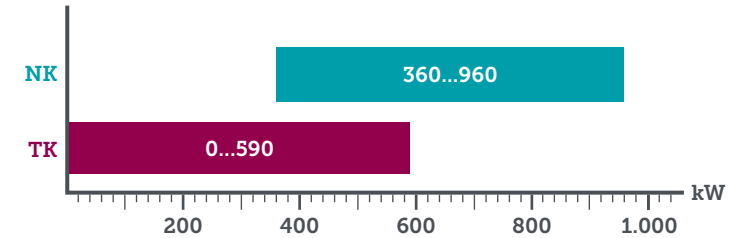

Quality




Profil

- Trans- & subcritical application
- 4-10 MT (LSPM) / 0-6 LT – different versions for capacity control
- Parallel compression
- Heat recovery / Heat pump & AC function
- TECO2nditioner
- Receiver volume 250 / (2x)420 L
- Flexible, customised technology – e.g. additional gas cooler subcooling or suction levels (MT2/LT2)
- Gas ejector (high-lift)


Pressure levels



Suction line
(LT)



Suction line
(MT)



Medium
pressure



High
pressure