



www.teko-gmbh.com



Roxsta cube mini S



Application



Discounters / supermarkets
up to **1,200 m²**




MT cabinets
open: up to 50 m
closed: up to 105 m




LT shelf / island
up to 10 m
1-2 LT cold rooms

CO₂

Performance

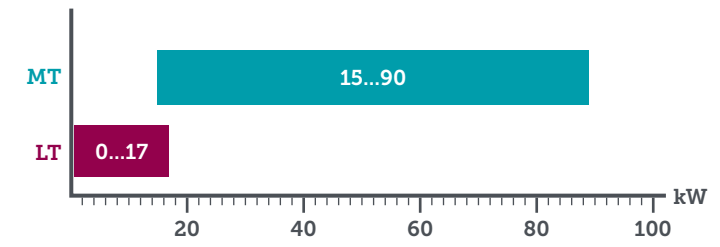

Quality

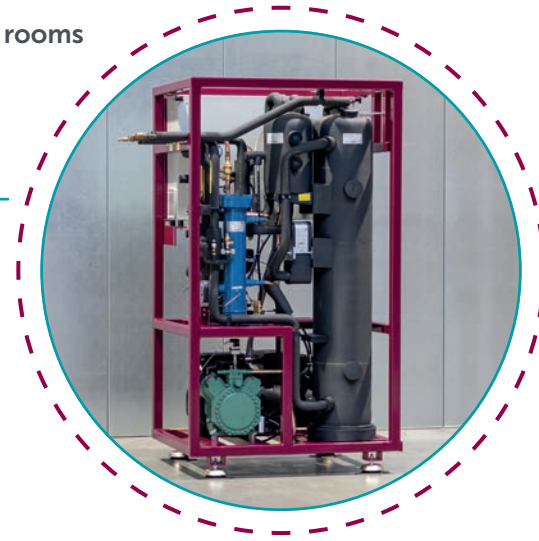


**1 m²
footprint**


Details

- Trans- & subcritical application
- 1 IT* & 2 MT (LSPM*) / 0-2 LT (ME*) – IQ module
- Capacity control – CR11 (MT/IT*) / Inverter* (LT9)
- TECO₂nditioner
- Active oil management – TECO₂mulator
- Receiver volume 92 L
- Indoor & outdoor* installation
- Mounted safety valves incl. blow off line*
- Efficiency – Parallel compressor / LSPM motor / Ejector*
- Heat recovery stand-alone* * Option


Pressure levels



Suction line (LT)



Suction line (MT)



Medium pressure



High pressure