



www.teko-gmbh.com



Roxsta 2.0

Application



Supermarkets
up to 5,000 m²




MT cabinets
open: up to 200 m
closed: up to 400 m



LT shelf / island
up to 100 m
LT cold rooms

CO₂

Performance

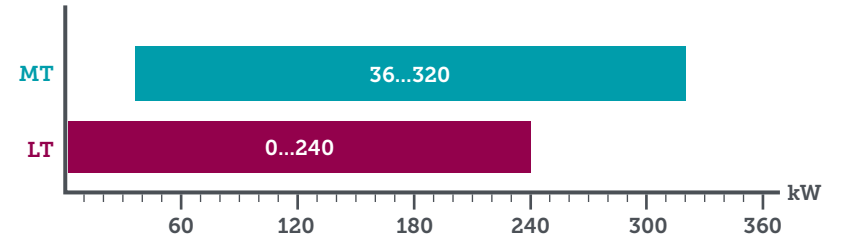

Quality




Details

- Trans- & subcritical application
- 3-6 MT (LSPM) / 0-5 LT – different variants for capacity control
- Parallel compression
- Separable intermediate pressure station
- Heat recovery / heat pump
- TECO₂ conditioner
- Receiver volume 250 / 420 L
- Gas ejector (high-lift)


Pressure levels



Suction line (LT)



Suction line (MT)



Medium pressure



High pressure